


Holly End House  
Water Lane  
Bovingdon  
Herts  
HP3 0NA

T: 00 44 (0) 1442 832764  
Fx: 00 44 (0) 1442 832550  
Em: [info@inagas.com](mailto:info@inagas.com)  
[www.inagas.com](http://www.inagas.com)



Now available an effective and simple to use PIB tape primary seal tape without the need for expensive equipment. It has been found that PIB is an excellent barrier against gas loss for both hot melt and 2 part.

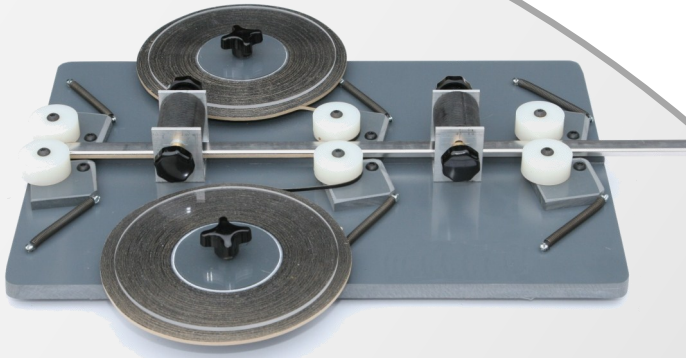

The Inagas tape is a butyl, 2 sided, self adhesive tape reinforced with a cotton mesh for stability. This unique tape has been developed for spacer bar application used in insulated glass.

Application can be by hand or using a simple tape applicator.

The applicator will take any width spacer bar. Simply push 4 metre lengths through the machine which will apply the butyl to both sides of the spacer. The bar is filled with desiccant and made into the frame and the backing paper removed.

## Technical Data

Size:	0.6mm x 3mm x 30m
Packing:	100 rolls per box
Gravity:	1.35
Non volatile content:	96.6%
Tensile to adhesion:	19.2 N/cm <sup>2</sup>

Certified to EN1279 Part 2 & 3

Certified to EN1279 Part 6UV/Fogging test